

**azbil**

# SVP3000 Alphaplus™

Smart Valve Positioner

**Improve your control valves.**

- Improves process control
- Improves productivity
- Reduces spares



# Auto Set-up, Auto Configuration, and Auto Calibration

## Benefits

### Improves process control

High accuracy and high resistance to vibration improve control valve performance, allowing tighter process control and reduction in product variability.

### Improves productivity


Easy-to-use fully automatic set-up and calibration, with diagnostics, makes these tasks easier and able to be completed in less time.

### Reduces spares

Single universal model applies to most valve applications.

## Features

- Compact, rugged, and lightweight
- Optional valve travel position transmitter : 4-20mA (Model AVP301)
- Configurable low flow cut-off
- Integral Auto-Manual bypass switch
- Split range setting
- Configurable valve output characterization for unique application.
- Communication :
  - HART® (Model AVP302)
  - FOUNDATION™ Fieldbus (Model AVP303)

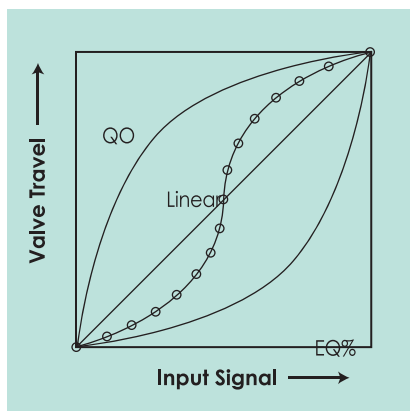


HART is a registered trademark of HART Communication Foundation.  
FOUNDATION is a trademark of Fieldbus Foundation.  
Other product names, model numbers and company names may be trademarks of the respective company.

## Azbil Corporation

Advanced Automation Company

Yamatake Corporation changed its name to Azbil Corporation on April 1, 2012.

1-12-2 Kawana, Fujisawa  
Kanagawa 251-8522 Japan  
URL: <http://www.azbil.com>

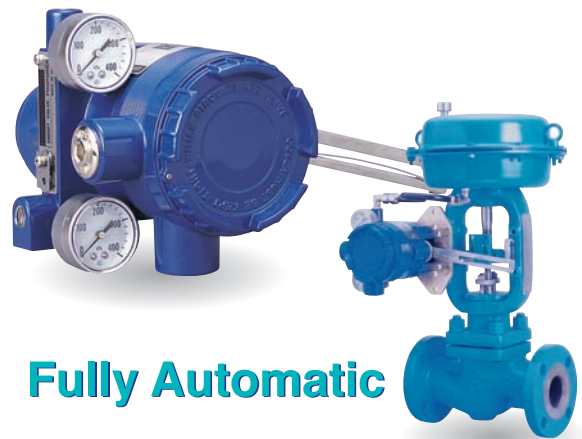

## Fully Automatic

## Easy to adjust

- No hand held communicator required, just switch with a screwdriver.
- Automatic valve calibration sequence for optimum valve performance.
- Externally accessible switch for auto set-up, automatic configuration and automatic calibration.
- Auto Set-up dynamically scans valve assembly and makes optimum adjustments.
- Non-interactive zero and span adjustments.

### Main Specification

Basic Model	AVP 300 / 301 / 302 / 303
Input	4-20 mA (Split range is possible), Fieldbus
Enclosure	NEMA 4 equivalent, IEC IP66 equivalent
Approval Bodies	FM / ATEX / TIIS / NEPSI / CSA Explosion Proof / Intrinsically Safe (For specific models, refer to Sales)
Air supply pressure	130 to 700 kPa (20 to 100 psi)
Vibration characteristics	2G at 5 to 400 Hz
Ambient temperature	-40 °C to 80 °C (-40 °F to 175 °F)
Weight	2.5 kg (5.5 lbs.)

[Notice] Specifications are subject to change without notice.  
No part of this publication may be reproduced or duplicated  
without the prior written permission of Azbil Corporation.